

► **Tunnel, completely in stainless steel, with automatic passage :**

- Suitable for the agrifood industry, central kitchens, hospitals, the industry, etc. In compliance with the regulations in force, it is adaptable due to its **low space requirement**, for the most limited areas, to provide you with the **utmost operating performance and flexibility** that you require !
- **Cost-effective**, with **high output**, it rinses & disinfects or washes & rinses, silently, your boxes, crates, tins, etc.
- **Clearance height : 400 mm, width : 610 mm.**

**SASA BODSON industrie :**

French manufacturer and designer, acknowledged by the entire profession, SASA Bodson develops **washing, cooking and vacuum packing** processes for the industry and food industry. With over 40 years of experience in high performance washing, the Company's key words are efficiency, reliability, sturdiness, savings and hygiene. Its highly effective after-sales service is ensured by our approved installers.

**The world of SASA BODSON Industrie ;**

a wide range of :

- **equipment washers,**
- **tunnels, rinsing, disinfecting,**
- **trolley washers,**
- **container washers & "Euro" container washers.**

**Washing & rinsing**  
**or**  
**rinsing & disinfecting**  
**before opening,**  
**in preparation areas**



**Design and manufacture of machines tailored to a specific washing process.**

**To meet your requirements in terms of time and hygiene**

► **CHARACTERISTICS**

- Rinsing crates in the tunnel  
400 x 600 - 400 x 800 - 600 x 800 mm.
- Cold water rinse with presence detector (saves water).
- Basic module enabling pre-rinse, rinse and disinfecting.
- Environmental dosing pump for washing, in the wash/rinse model.
- Volumetric dosing pump for the rinsing/disinfecting model.

► **OPERATION**

- Forwarded by 2 stainless steel chairs or stainless steel belt with variable speed in wash/rinse model.
- Forwarded by 2 stainless steel belt with variable speed in the rinse/disinfect model.

► **DESIGN**

- Stainless steel 18/10 (AISI 304).
- Lateral door giving access to 1 filter, strainers and ramps.

► **SUPPLY**

**Electricity** : 400 V three-phase + ground in 50 Hz + neutral.

**Water** : 3/4 in. female- pressure required between 2.5 and 3.5 bars maximum - T.H. between 2 and 6.


► **OPTIONS**

- Clearance height.
- Rinse superheater for the wash/rinse model.
- Inlet and outlet tables.
- Rinsing product dosing pumps.


► **ONE-YEAR GUARANTEE**

TUNNEL 1500	Washing/Rinsing	Rinsing/Disinfecting
<b>Output/Hour*</b>	<b>200 to 700 crates*</b>	
Washing bath heating power	12 kW	cold water
Rinse superheater power	24 kW (optional)	-
Washing pump power	2,2 kW (3 CV)	0,88 kW
Maximum washing temperature	60° C	-
Maximum rinsing temperature	90° C	-
Connecting power	<b>39 kW</b>	<b>1 kW</b>
Water consumption per cycle	<b>8 L / min</b>	<b>10 L / min</b>
Water quantity for filling	<b>100 L</b>	<b>100 L</b>
Clearance height (mm)	<b>400</b>	<b>400</b>
Clearance width (mm)	<b>610</b>	<b>610</b>
<b>Overall dimensions (mm)</b>	<b>1500 w x 1100 d x 1650 h</b>	<b>1500 w x 1100 d x 1650 h</b>
Net weight	390 kg	380 kg

\*According to the speed, conveyor and crate dimensions.

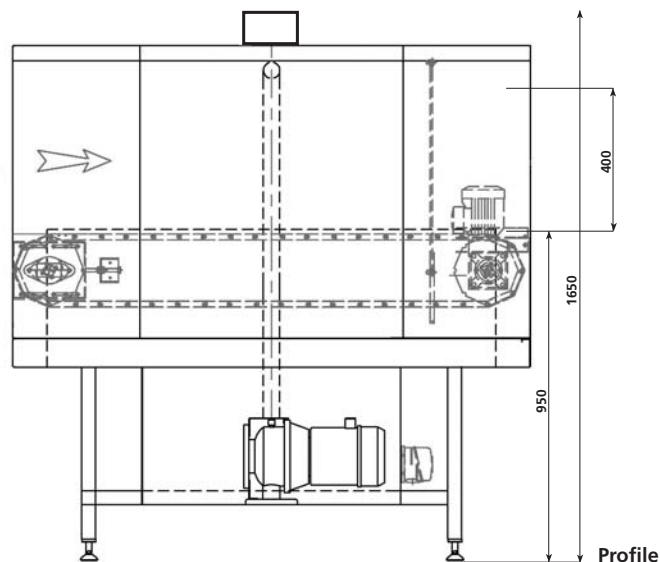

Profile

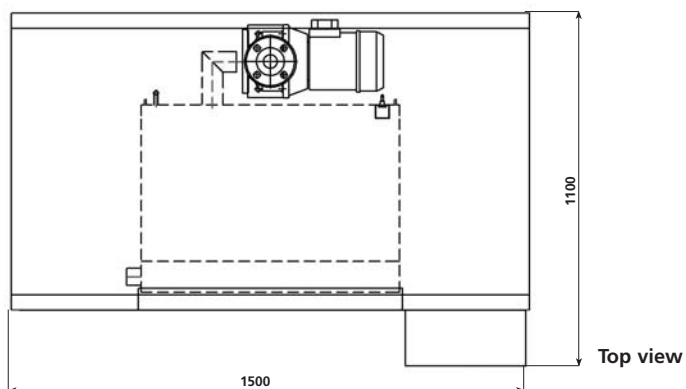

Top view

**For further information :**  
**Tél : +33 327 84 36 28**  
Fax : +33 327 77 89 44

**contact@bodson-industrie.com**  
Z.I. N° 1 - B.P. 50009  
59360 LE CATEAU-CAMBRESIS - FRANCE