

► The SASA Bodson Industrie "Euro" container washers meet all your requirements :

- Ultra professional and compact, they wash and disinfect "Euro" containers in an instant, 200 litres or 2 x 200 litres for the double model. (For other specifications, contact us).
- Cost-effective, for a substantial output, the SASA Bodson "Euro" container washers, in addition to maximum safety in the handling area (lateral protection and detection cell at the front), easily adapt to "special atmospheres" due to their low space requirement.
- Robust (completely in stainless steel), reliable and easy to use (automatic load of containers), the SASA Bodson "Euro" container washers, ensure for you, day after day, year after year, optimal washing and disinfection of your containers.

'Euro' container washing tunnels with conveyor



SASA BODSON industrie :

French manufacturer and designer, acknowledged by the entire profession, SASA Bodson develops **washing**, **cooking** and **vacuum packing** processes for the industry and food industry. With over 40 years of experience in high performance washing, the Company's key words are efficiency, reliability, sturdiness, savings and hygiene. Its highly effective after-sales service is ensured by our approved installers.

SINGLE or DOUBLE CAPACITY
For high-quality performance



Design and manufacture of machines tailored to a specific washing process.

► FONCTIONNEMENT

- Automatic cycle :

Wash : modular from 0 to 10 mn,

Drain : modular from 5 to 50 sec,

Rinse : modular from 5 to 50 sec,

Drain : modular from 2 to 20 sec.

- **Capacity per cycle** : 1 to 2 "euro" containers.

► DESIGN

Stainless steel AISI 304 construction.

Wash-drain, rinse-drain cycle.

1 swivel door.

Recycled water wash.

Control of cycle length, 0 to 10 minutes (on average, plan 5 min), i.e. 6 to 20 cycles/hour according to the model.

Washing water temperature regulation, maximum 60°C.

Rinsing water temperature regulation, maximum 90°C.

1 washing ramp and 1 inside and outside rinsing ramp.

1 interior rotating head per container.

Lateral control box.

Lateral safety barrier and front cell.

► SUPPLY

Electricity : 400 V three-phase + ground in 50 Hz + neutral.

Water : 3/4 in. female- pressure required between 2.5 and 3.5 bars maximum - T.H. between 2 and 10 – supply at 50° minimum.

Compressed air : 6 bars.

► OPTIONS

Rinse booster pumps in case of network water pressure below 2.5 bars (pipe section Ø 16-18 mm minimum).

Rinsing product dosing pump, flow rate managed by microprocessor

Vapour heating.

► ONE-YEAR GUARANTEE

The world of SASA BODSON industrie ;

a wide range of :

- washers,
- tunnels, rinsing, disinfecting,
- trolley washers,
- container washers.

For further information :

Tél : +33 327 84 36 28

Fax : +33 327 77 89 44


contact@bodson-industrie.com

Z.I. N° 1 - B.P. 50009


59360 LE CATEAU-CAMBRESIS - FRANCE

"EURO" CONTAINER WASHERS	SINGLE	DOUBLE
Output/Containers/Hour	6 to 10	10 to 20
Washing bath heating power	18 kW	24 kW
Rinse superheater power	9 kW (option)	2 x 9 kW (option)
Washing pump power	9,2 kW (12,5 cv)	9,2 kW (12,5 cv)
Maximum washing temperature	60°C	60°C
Maximum rinsing temperature	90°C	90°C
Maximum power consumption	37 kW (with option)	52 kW (with option)
Water consumption per cycle	10 L	20 L
Water quantity for filling	190 L	400 L
Type of door opening	on swivel hinge	
Overall dimensions (mm)	1550 w x 2900 d x 2151 h	2452 w x 2900 d x 2151 h
Net weight	500 kg	700 kg
"EURO" containers	1 x 200 L*	2 x 200 L*


*For others, contact us.

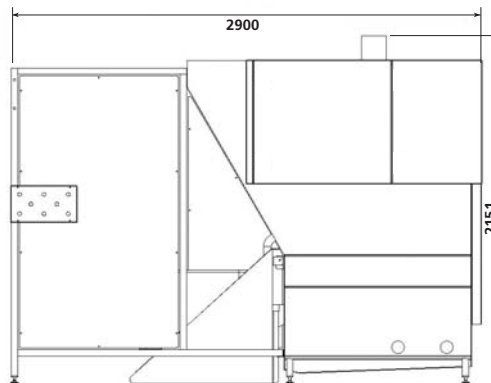


Single "Euro" container washers/Profile

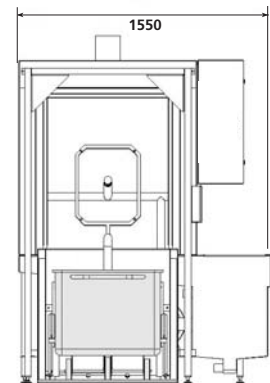

Load side

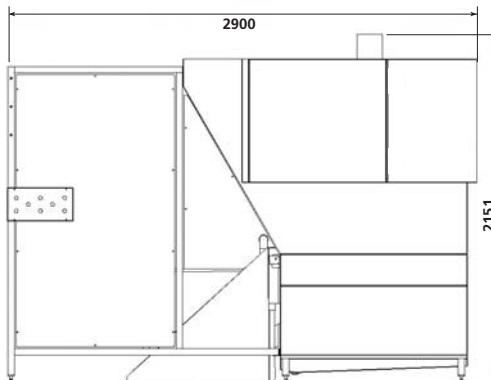

Double "Euro" container washers/Profile

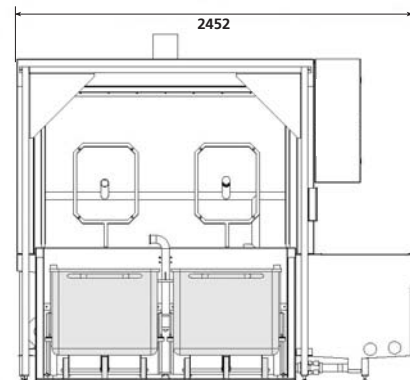

Load side